

# Declaration of Performance

DoP No.: E T A - 14/0216 for S-3B

1. Unique identification of the product type: 141090032120
2. Intended use: general building construction: hold-down connectors made of steel plate HR1 graded according to ISO 3573:2008 with tensile strength  $Re \geq 270 \text{ N/mm}^2$  and  $Rm \geq 440 \text{ N/mm}^2$  evaluated according to ISO 6892-1. They are used in combination with cylindric bolts Fe 360 B graded according to ISO 630 in order to connect glulam-wood column to glulam beam or sill connected to a rigid type support in like concrete or steel support. The glulam is pre-cut in factories with specific dimensions and tolerances.

The beam, sills and posts are of glulam according to EN 14080 with a minimum strength grade of GL24.

With regard to moisture behaviour of the support and/or beam, the use is possible in service classes 1 and 2 as defined in EN 1995-1-1:2004 for the hangers and hold-down made out of zinc coated steel.

Static or quasi-static loads only.

3. Manufacturer: Suteki Europe NV / Nice Pre-cut, Duwijkstraat 17, 2500 Lier, Belgium, [www.suteki-europe.com](http://www.suteki-europe.com)

4. Authorized representative: Mr. Shintaro Nishimura

5. Safety in case of fire (BWR 2): NPD

6. Hygiene, health and the environment (BWR 3): do not contain harmful or dangerous substances as defined in the EU database

7. Safety in use (BWR 4): For Basic requirement Safety in use the same criteria are valid as for Basic Requirement Mechanical resistance and stability.

8. Protection against noise (BWR 5): Not relevant.

9. Energy economy and heat retention (BWR 6): Not relevant.


10. Sustainable use of natural resources (BWR 7): NPD

11. CE Marking Certificate Number: 0679-CPR-1028

12. Assessment and verification of constancy of performance (AVCP):

Product	Intended use	Level or class	System
STRUCTURAL TIMBER PRODUCTS/ELEMENTS AND ANCILLARIES	For fixing and/or supporting to concrete or wood, structural elements which contributes to the stability of the works.	—	2+

13. Mechanical Resistance

N°	Type	Pins number diameter and length	Post/header section	Beam section	Characteristic Ultimate ( $R_k$ ) and elastic ( $R_{y,k}$ ) resistance values for each load direction (KN)		
					UP	DOWN	TRACTION (horizontale)
S-3B		2 x Ø13-105 mm or 120 mm	105 mm x 180 mm to 450 Or 120 mm x 120 mm	105 mm or 120 mm x 180 to 450 mm	$R_{y,k} = 4,24$	$R_{y,k} = 17,6$	$R_{y,k} = 19,5$
		3 x Ø13-105 mm or 120 mm	105 mm x 180 mm to 450 Or 120 mm x 120 mm	105 mm or 120 mm x 180 to 450 mm	$R_{y,k} = 6,58$	$R_{y,k} = 22,0$	$R_{y,k} = 19,5$


Name (Print):

Shintaro Nishimura

Position:

Director of Suteki Europe NV

Signature:

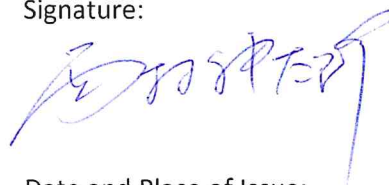

Date and Place of Issue:

30/09/2020, Lier, Belgium